


10/26/00



JC955 U.S. PTO

10/27/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
UTILITY PATENT APPLICATION TRANSMITTAL

10/26/00
 09/697203
 10/26/00

ASSISTANT COMMISSIONER OF PATENTS
 Box Patent Application
 Washington, D.C. 20231

Attorney Docket No. 24096.00500
 Prior Application Number:
 Art Unit:
 Examiner:
 PTO Customer Number:

Sir:

Transmitted herewith for filing is a utility patent application of

Lester J. Kozlowski, 212 Golden Fern Court, Simi Valley, CA 93065

for: COMPACT ACTIVE PIXEL WITH LOW-NOISE IMAGE FORMATION are the following:

1. ☒ Specification, abstract and claims of 19 pages.
2. ☒ 8 sheets of ☐ formal ☒ informal drawings ☐ No drawings.
3. ☒ Declaration (original or copy) by the named inventor(s) - unsigned.
4. ☐ Preliminary Amendment
5. ☐ Information Disclosure Statement
6. ☒ Other: Return Post Card

NOTE the following:

7. ☐ Applicant is a small entity. Unsigned Small Entity Statement enclosed – 50% Filing Fee Reduction (if applicable)
8. ☐ The prior application is assigned to
9. This application is a:
☐ Continuation ☐ Divisional ☐ Continuation-in-Part (CIP) of Prior Application

Filed:

10. ☐ Priority of the following application(s) is (are) claimed under 35 U.S.C. 119:

Serial No.	Date Filed	Country	<u>Certified Copy of Priority Doc. Filed</u>	
			USSN or PCT#	Date


11. ☐ An Extension of Time is filed concurrently herewith for the parent application.
12. ☐ Cancel claims _____ prior to calculation of the filing fee.

FILING FEE: calculated below (after accounting for any preliminary amendment or claims cancellations if noted above):

<input checked="" type="checkbox"/>	Total Claims	15	Total Claims Subject to Fees: 0	\$
<input checked="" type="checkbox"/>	Independent Claims	4	Total Claims Subject to Fees: 1	\$80.00
<input type="checkbox"/>	Multiple Dependent Claims			\$
<input checked="" type="checkbox"/>	Basic Filing Fee			\$710.00
<input type="checkbox"/>	Extension Fees			\$
	Sub-Total			\$790.00
<input type="checkbox"/>	Less Small Entity Fee Reduction			\$
<input type="checkbox"/>	Assignment Recordal Fees			\$
	Total Fees			\$790.00

- ☒ Check(s) no 473543 in the amount of \$790.00 is enclosed (must at least cover the basic fee). If no check or an insufficient check is enclosed and a fee is due herewith, the Commissioner is authorized to charge any fee or additional fee due in connection herewith to Deposit Account No. 03-3821, **referencing Attorney Docket No. 24096.00500. A duplicate of this sheet is enclosed.**
- ☒ The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or 1.17 to Deposit Account No. 03-3821, **referencing Attorney Docket No. 24096.00500. A duplicate copy of this sheet is enclosed.**

Respectfully submitted,


 By: Doyle B. Johnson
 Registration No.: 39,240

Date: October 26, 2000

Crosby, Heafey, Roach & May
 P.O. Box 7936
 San Francisco, CA 94120-7936


Certificate of Mailing by "Express Mail"

Express Mail Mailing Label Number: EL588330379US Date of Deposit: October 26, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service By "Express Mail Post Office Addressee" Service under 37 CFR 1.19 on the date indicated Above and is addressed to the Assistant Commissioner for Patents, Washington, DC 20231

Nicole Broce

Name of Mailing Individual


 Signature of Mailing Individual

PATENT APPLICATION

**COMPACT ACTIVE PIXEL WITH
LOW-NOISE IMAGE FORMATION**

Inventor: Lester J. Kozlowski

Assignee: Rockwell Technologies, LLC

Crosby Heafey Roach & May
P.O. Box 7936
San Francisco, CA 94120-7936
(415) 543-8700

COMPACT ACTIVE PIXEL WITH LOW-NOISE IMAGE FORMATION

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to electronic imaging devices and, more particularly, to low noise CMOS image sensors having increased optical area within each pixel.

2. Description of the Related Art

Significant advances in photosensor image processing for camera and video systems are now possible through the emergence of CMOS pixel sensors. CMOS-based imaging sensors have distinct manufacturing cost savings and consume much less power than other technologies such as charge coupled devices (CCD). A CMOS image sensor's performance, however, is often limited by the noise generated by resetting each of its photodiodes to a known potential after each electronic image, or picture, is read out. Such noise is readily suppressed in CCD-based cameras because CCD reset noise is generated on only one capacitance, i.e., the sense diffusion diode that converts the photo-generated charge to a voltage. Also, full-frame memory is not needed to post-process the video to remove the reset noise because each pixel's reset and signal levels are successively read and the reset noise is conveniently removed by using only one memory element.

Similarly, the reset noise (kTC) in a CMOS sensor causes uncertainty about the voltage on each photo-detector following the reset, but each pixel's reset signal is not normally available. Because the reset noise of CMOS imagers is often the dominant source of temporal noise and is critical to overall imager performance, there is a need for a pixel-based preamplifier that suppresses reset noise without requiring

00697203.102600

circuit and method for successively reading the reset and signal levels. The system requires that the column buffer supporting each column of pixels preferably dwells on each specific row (c.f., FIGS 5 and 6 of U.S. Patent No. 5,898,168) in order to optimally perform the correlated double sampling required for suppressing reset noise by successively reading each video line's reset and signal levels. Alternatively, a full page of memory must be allocated either on-chip or in the external camera electronics to subtract each pixel's reset value from its final signal value on a frame-by-frame basis. Further, the image formation process should preferably be performed on a row-by-row basis in order to minimize inaccuracy in measuring the reset and signal levels for each pixel. The basic three transistor circuit thus generates large motion artifacts because of the need to successively read the reset and signal levels during each line of video. Minimizing such artifacts results in an alternative embodiment comprising five transistors per pixel, as illustrated in FIG. 15 of the '168 patent.

Figure 2 is reproduction of the timing diagram for operating the three transistor pixel of the '168 patent. Each line of video in the imager is separately reset (47), signals are separately integrated (39, 41 and 43), separately read (49), and then reset again to prepare for the next frame time. An imager comprising N rows thus forms an electronic image over N separate integration times.

In view of the foregoing, it would be desirable to have a pixel cell comprising only three transistors, to maximize the optical area, while still having low-noise and minimizing motion artifacts.

SUMMARY OF THE INVENTION

In general, the present invention comprises a low-noise imaging system for implementation in CMOS or in other semiconductor fabrication technologies. The

low-noise amplifier system efficiently suppresses reset (kTC) noise by using a compact preamplifier consisting of a photodetector and only three transistors of identical polarity in conjunction with ancillary circuits located on the CMOS imager's periphery. A tapered reset signal is applied to a reset transistor within the pixel to reduce the reset noise. The supporting circuits help the simplified pixel circuit to read the signal with low noise without having to perform correlated double sampling on either successive rows or the entire array.

The low noise amplifier system of the present invention is formed by the aggregate circuitry in each pixel, the supporting circuitry in the column buffer amplifier and the row-based clock driver, and the waveform generation circuits servicing each column and row of pixels. The video from the active pixels is read out by the low-noise signal amplification system in a manner that essentially eliminates the reset noise. In addition to means for suppressing the detector's reset noise, the column buffer in the downstream electronics typically performs additional signal processing, sample-and-hold, optional video pipelining, and column amplifier offset cancellation functions to suppress the temporal and spatial noise that could otherwise be generated by the column buffer.

The low-noise system provides the following key functions: (1) suppresses reset noise without having to provide means for analog memory to facilitate correlated double sampling; (2) provides high sensitivity via source follower amplification with small sense capacitance; (3) minimizes demand on amplifier bandwidth to avoid generation of fixed pattern noise due to variations in amplifier time constant and stray capacitance; (4) provides adequate power supply rejection to enable development of imaging systems-on-a-chip that do not require elaborate support electronics; and (5) is

compatible with application to imaging arrays having pixel pitch to below 2.7 microns with high optical fill factor and low noise using 0.18 μ m CMOS technology.

The invention has the advantage of full process compatibility with standard silicided submicron CMOS; helps to maximize yield and minimize die cost because the circuit complexity is distributed amongst the active-pixels and peripheral circuits; and exploits the signal processing capability inherent to CMOS. Also, the spectral response is broad from the near-ultraviolet (400 nm) to the near-IR (>800 nm).

Because the present invention has only three MOSFETs in each pixel, the invention provides as-drawn optical fill factor of 60% at 5 μ m pixel pitch using 0.25 μ m design rules in CMOS. The actual optical fill factor is somewhat larger due to lateral collection and the large diffusion length of commercial CMOS processes. A final advantage is the flexibility to collocate digital logic and signal-processing circuits due its high immunity to electromagnetic interference.

When fully implemented in the desired camera-on-a-chip architecture, the low-noise APS can provide temporal read noise below 10 e⁻ (at data rates compatible with either video imaging or still photography via electronic means), fixed pattern noise significantly below 0.02% of the maximum signal (on a par with competing CCD imagers), <0.5% nonlinearity, ≥ 1 V signal swing for 3.3 V power supply, large charge-handling capacity, and variable sensitivity using simple serial interface updated on a frame-by-frame basis via digital interface to a host microprocessor.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be readily understood by the following detailed description in conjunction with the accompanying drawings, wherein like reference numerals designate like structural elements, and in which:

Figure 1 is a schematic of a prior art circuit taught by U.S. Patent No. 5,898,168;

Figure 2 is a timing diagram illustrating the operation of the prior art circuit taught by U.S. Patent No. 5,898,168, including the specific read out of both the reset and signal levels on a row-by-row basis;

Figure 3 is a schematic circuit diagram illustrating the compact amplifier system for the CMOS imaging array of the present invention;

Figure 4 is a schematic circuit diagram illustrating the compact amplifier system for the CMOS imaging array of the present invention as each row of the imaging array is being reset;

Figure 5 is a schematic circuit diagram illustrating the compact amplifier system for the CMOS imaging array of the present invention during integration of the photo-generated signal;

Figure 6 is a schematic circuit diagram illustrating the compact amplifier system for the CMOS imaging array of the present invention during row-based readout of the imaging array;

Figure 7 is a small-signal equivalent circuit diagram illustrating the compact amplifier system for the CMOS imaging array of the present invention during feedback-enhanced reset;

Figure 8 is a diagram illustrating the tapered reset waveform, V_{reset} , which is supplied to the Φ_{rst} clock during row-based reset of the imaging array; and

Figure 9 is a clock timing diagram illustrating the process of signal integration across a representative imager array and the successive application row-based tapered reset.

DETAILED DESCRIPTION OF THE INVENTION

The following description is provided to enable any person skilled in the art to make and use the invention and sets forth the best modes contemplated by the inventor for carrying out the invention. Various modifications, however, will remain readily apparent to those skilled in the art, since the basic principles of the present invention have been defined herein specifically to provide a low noise CMOS image sensor circuit. Any and all such modifications, equivalents and alternatives are intended to fall within the spirit and scope of the present invention.

The CMOS readout and amplification system of the present invention includes an exemplary design for an active-pixel CMOS imager. A prototype embodiment of the low-noise Active Pixel Sensor (APS) invention can be configured, for example, as a visible imager comprising an array of 1024 (columns) by 728 (rows) of visible light detectors (photodetectors). The rows and columns of active-pixels can be spaced 5 microns center-to-center using 0.25 μm design rules to provide as-drawn optical fill factor of ~60%. Several columns and rows of detectors at the perimeter of the light-sensitive region are normally covered with metal and used to establish the dark level for on-chip or off-chip signal processing. In addition, the detectors in each row can be covered with color filters to produce color imagers. For example, the odd rows may begin at the left with red, green, then blue filters, and the even rows may begin with blue, red, then green filters, with these patterns repeating to fill the respective rows. A standard Bayer filter pattern can also be applied.

The low-noise amplifier system 10 of the present invention is illustrated in the schematic diagram of Figure 3. In the preferred embodiment, each pixel 10 of the sensor array comprises a photodetector 12 along with three transistors of identical polarity to efficiently use the available pixel real estate. Transistor M1 serves dual

roles as the driver of a source follower amplifier for the specific time when the signal is being read on a row-by-row basis, and as the driver of a reset amplifier when the photodetector 12 is being reset. Reset is also performed on a row-by-row basis. Approximately 30 μ s is required to reset each row of pixels via the present invention by using circuitry outside of the pixel to effect reset amplification during signal reset. The present invention thus suppresses reset noise without having to implement correlated double sampling using either on-chip or off-chip memory.

Transistor M2 transfers the signal from each detector 12 to the gate of transistor M1 and also connects the detector 12 to the reset node at the gate of transistor M1. Transistor M3 is used in two operating modes. During reset, it completes the reset loop consisting of transistor M3 in the pixel 10, column bus 20, the reset transistor M201 in column circuit 200, and column bus 22. This feedback loop discharges any charge left on the photodetector 12 along with the charge stored on the gate of transistor M1. In combination with amplifier transistor M1, switch transistor M202 in column buffer 200, switch transistor M102 in column buffer 100, and current source I_{reset} in column buffer 200, low-noise reset of the pixel is accomplished via the aggregate reset amplifier.

The photodiode 12 may comprise a substrate diode, for example, with the silicide cleared. In this embodiment, it is necessary to clear the silicide because it is opaque to visible light. Pixel 10 is designed to obtain the largest available light detecting area while providing broad spectral response, control of blooming and signal integration time, and compatibility with CMOS production processes.

For maximum compatibility with standard submicron CMOS processes, photodiode 12 may be formed at the same time as the lightly doped drain (LDD) implant of n-type MOSFETs for the chosen process; this creates an n-on-p photodiode

junction in the p-type substrate that is common to most CMOS processes. Since no additional ion implantation is necessary, the process and wafer cost for active-pixel circuit 10 are the same as those of standard, high volume digital electronic products.

In the preferred embodiment, the photodetectors 12 are reset at the start of image capture on a row-by-row basis as shown in Figure 4. Bus 24 connects the pixels in a specific column to a corresponding column circuit 100. Buses 20 and 22 connect all the pixels in a specific column to a second corresponding column circuit 200 comprising switch transistors M201, M202 and M203, and current source I_{reset} . Buses 26 and 28 connect all the pixels in a specific row to corresponding row driver 300 consisting of clock drivers Φ_{reset} , Φ_{access} and $\Phi_{\text{row_disable}}$. For the row being reset, Φ_{access} is "ON" and the Φ_{reset} waveform is equivalent to the V_{reset} waveform of Figure 8. For all the other rows, both Φ_{access} and Φ_{reset} are "OFF". The feedback path for resetting the photodiode 12 in a resetting row of pixels is hence completed by connecting the drain of M3 to the drain of M1 via the path through switch transistors M201 and M202. The photodiode 12 is connected to the gate of M1 via switch transistor M2, which is fully enabled during this epoch. The inverter amplifier consisting of transistor M2 and current source I_{reset} is thus configured as a reset integrator with capacitive-feedback provided by M1's Miller capacitance. Low-noise reset of photodiode 12 and the gate of M1 are thus performed by applying a tapered reset waveform to the gate of M3. The signal Φ_{Reset} is specifically generated in the row driver circuit that supports each row of the CMOS imager. Transistor M1 thus acts as a transconductance, and reset transistor M3 acts as a resistance controlled by Φ_{Reset} . The series resistance of transistor M3 is gradually increased by applying slowly a decreasing ramp waveform (Figure 8) to the gate to give the feedback

transconductance of transistor M1 the opportunity to null the reset noise. This active-pixel implementation resets within an aperture of tens of microseconds using standard CMOS technology.

The present invention configured for signal integration is illustrated in Figure 5. Transistors M2 and M3 are now disabled to allow charge to integrate on the photodiode capacitance. As photons are collected by the photodiode 12, the resulting photocharge effectively discharges the photodiode 12 from its previously established reset voltage. For the illustrated embodiment, the photo-generated electrons discharge the anode of photodiode 12 toward ground. All supporting row driver and column buffer circuits are turned off to isolate the array of pixels for unperturbed signal integration. The pixel is configured in this manner for the specified integration time to provide an electronic shutter.

Figure 6 shows the same circuitry as before, but with the switch and clock configuration revised for signal readout. Within each row, pixels 10 are read out from left to right or right to left. Readout is initiated by enabling switch transistor M203 so that the upper leg of M1 is connected via bus 22 to low-impedance voltage source V_{Read_amp} . The lower leg of M1 is connected to current source I_{read} in column buffer 100 via column bus 24 and switch transistor M101. Transistor M1 is now the drive transistor of the distributed source follower so that the signal from the gate of each transistor M1 is efficiently transferred to column bus 24. Inactive rows, i.e., those not being read, are disabled by enabling transistors M3 and M301 so that the $\Phi_{row_disable}$ clock is connected to the gate of transistor M1 to disable the source followers in these rows.

The application of the tapered reset waveform to the composite reset amplifier enables the kTC noise envelope to decay before the reset switch M3 is completely

opened. Using tapered reset, the row is resettable to tens of microseconds for full noise suppression, or shorter time for moderate noise reduction. U.S. Patent Application Serial No. 09/057,423 (assignee docket number 97SC087), entitled "COMPACT LOW-NOISE ACTIVE PIXEL SENSOR WITH PROGRESSIVE ROW RESET" filed on April 8, 1998, the disclosure of which is herein incorporated by reference, describes the generalized small-signal equivalent circuit model during reset. This circuit allows calculation of the steady-state noise envelope at the reset node depending on reset switch resistance, R_{sw} . If the reset voltage is ramped down too slowly, too much time is needed to reset each row and operation at video frame rates can become problematic. If the tapered-reset waveform is instead ramped down too quickly, then the kTC noise envelope will not decay sufficiently to suppress reset noise before the switch is completely opened.

In Figure 7, which is the small-signal equivalent circuit for the composite reset amplifier, the photodiode node has voltage V_1 and capacitance C_1 to ground. The amplifier output node has voltage V_2 , output capacitance C_o , and output conductance G_o to ground. C_o is the capacitance associated with the entire reset access bus, most of which comes from the M3-M4 junctions of each row. g_m is the transconductance of transistor M1, possibly degenerated by transistor M4; it is shown as a controlled current source. The feedback capacitance, C_{fb} , is the parasitic Miller capacitance of transistor M1. Noise from transistor M1 is represented by current source i_n , and noise from transistor M3 (which is operated in the ohmic region) is represented by voltage source V_n . Not included in this simplified model is the noise from capacitive feed-through of the tapered-reset waveform.

Using the small-signal equivalent circuit, a simplified noise formula can be derived since:

$$i_n^2 = \frac{4}{3}(4kT)g_m ;$$

$$v_n^2 = 4kTR_{sw}$$

Assuming that the amplifier's dc gain, A_{dc} , is much greater than 1, then the RMS reset noise is:

$$Q_n \cong \sqrt{kT(C_{amp} + C_{sw})_1} + \sqrt{kTC_{fb}}$$

$$Q_n \cong \sqrt{\frac{kTC_1}{1+k_1+k_2}} + \sqrt{kTC_{fb}}$$

where $k_1 = \frac{R_{sw}G_oC_1}{C_o + C_1}$ and $k_2 = \frac{R_{sw}g_mC_{fb}}{C_o + C_1}$

The tapered-clock waveform's time constant is thus appropriately selected so that the dimensionless quantity $(k_1 + k_2)$ is significantly >1 . The reset noise is hence reduced to the much smaller quantity stemming from the transconductance amplifier's feedback capacitance. In the present invention, this feedback capacitance is the parasitic Miller capacitance of MOSFET M1.

The present invention has the approximate design values: 1000x700 format, 7 $\mu\text{m} \times 7 \mu\text{m}$ pixel, $g_m=20 \mu\text{mho}$; $G_o=0.08 \mu\text{mho}$, $A_{dc}=300$; $C_1=15 \text{ fF}$; $C_o=3.0 \text{ pF}$ and $C_{fb}=0.3 \text{ fF}$. The desired tapered-clock frequency of 25 kHz that is fully compatible with video rate operation hence requires $R_{sw}=50 \text{ G}\Omega$ and an optimum tapered-clock time constant of 25 μs . This yields $k_1+k_2=58$ for the preferred embodiment, and an equivalent noise capacitance of 1.18 fF. Since the nominal detector capacitance is 15 fF and kTC noise is proportional to the square root of the relevant capacitance, the reset noise is suppressed from about 55 e- to only 14 e-.

The value of R_{sw} must be tailored to support any changes in line rate. Increasing the line rate hence requires lower switch resistance. Table 1 below numerically illustrates the impact on reset noise as the tapered-clock time constant is

appropriately shortened. At a time constant of 2.7 μ sec, the read noise degrades to 55

e⁻.

Table 1. Impact on Reset Noise for Preferred Embodiment

$R_{sw} (G\Omega)$	50	20	10	5	2	1	0.5	0.1
k_1+k_2	58	23.2	11.6	5.8	2.32	1.16	0.58	0.12
Reset Noise (e ⁻)	14	17	21	26	35	41	47	55
τ (μ sec)	25	25	24	22	18	14	9.5	2.7

In the preferred embodiment, column bus 20 is monitored by a standard column buffer to read the video signal when it is available. The key requirements on the column buffer are similar to conventional designs having to handle voltage-mode signals and are familiar to those skilled in the art.

In the present invention, the various clocks are generated on-chip using standard CMOS digital logic. This digital logic implementation thus enables "windowing," wherein a user can read out the imager in various formats simply by enabling the appropriate support logic to clock the appropriate sub-format. With windowing, the 1024 x 728 format of the candidate embodiment can be read out as one or more arbitrarily sized and positioned M x N arrays without having to read out the entire X x Y array. For example, a user might desire to change a computer-compatible "VGA" format (i.e., approximately 640 x 480) to either Common Interface Format (CIF; nominally 352 x 240) or Quarter Common Interface Format (QCIF; nominally 176 x 120) without having to read out all the pixels in the entire array. This feature simplifies support electronics to reduce cost and match the needs of the particular communication medium. As an example, a personal teleconference link to a remote user having only QCIF capability could be optimized to provide QCIF resolution and thus reduce bandwidth requirements throughout the teleconference link. As a further example, an imager configured in Common Interface Format (CIF)

could provide full-CIF images while supplying windowed information for the portions of the image having the highest interest for signal processing and data compression. During teleconferencing the window around a person's mouth (for example) could be supplied more frequently than the entire CIF image. This scheme would reduce bandwidth requirements throughout the conference link.

Figure 9 illustrates representative clock timing waveforms for reading the signal from each row, resetting each row using a tapered reset waveform, and then proceeding to the next row even as signal integration continues across the array in the same manner as a focal plane shutter. To read the first row, an internally generated clock waveform designated "ROW1" enables the video readout and reset processes previously shown in detail in Figures 4 and 6. When the corresponding "READ" pulse is high, for example, signal readout is performed as per Figure 6. The pixel reset configuration depicted in Figure 6 occurs during the time when the TAPERED RESET clock is shown active (just after READ goes low). Since signal integration and hence, image formation, proceed through the array as a progressive, electronic focal-plane shutter per the operating specifics shown in Figure 5, the maximum image latency between rows is one row time. The maximum image latency across the entire imaging array is about one frame time, which is essentially about two integration times when the integration time is comparable to the frame time. Further, since separate readout of the reset and signal voltages is not needed, it is not necessary to wait on each row to perform correlated double sampling.

Though not explicitly shown in Figure 9, the programmability of the present invention also allows integration epochs of less than or equal to one line period (or time). In such a case, each line's integration epoch does not overlap with the integration epochs of adjacent lines. The image formation, however, is still

progressive and formed on a row-by-row basis without the need for reading the reset voltages.

Those skilled in the art will appreciate that various adaptations and modifications of the just-described preferred embodiments can be configured without departing from the scope and spirit of the invention. Therefore, it is to be understood that, within the scope of the appended claims, the invention may be practiced other than as specifically described herein.

CLAIMS

What is claimed is:

- 1 1. An active pixel sensor circuit comprising:
2 a photodetector;
3 an access transistor connected to the photodetector;
4 an amplifier transistor connected to an output of the access transistor
5 and to a signal output bus; and
6 a reset transistor connected between the access transistor and the
7 amplifier transistor, wherein the reset transistor is reset with a tapered reset signal.
- 1 2. The circuit of Claim 1, wherein the transistors are MOSFETs of identical
2 polarity.
- 1 3. The circuit of Claim 2, further comprising a first column buffer connected
2 to the reset and amplifier transistors.
- 1 4. The circuit of Claim 3, further comprising a second column buffer
2 connected to signal output bus.
- 1 5. The circuit of Claim 4, further comprising a row disable transistor
2 connected to the reset transistor.
- 1 6. The circuit of Claim 5, wherein the first column buffer, second column
2 buffer and row disable transistor are connected to a plurality of active pixel sensor
3 circuits.
- 1 7. The circuit of Claim 6, wherein the amplifier transistor operates as a driver
2 of a source follower amplifier when a signal from the photodetector is being read out
3 on a row-by-row basis, and operates as a driver of a reset amplifier when the
4 photodetector is being reset.
- 1 8. An active pixel sensor circuit comprising:

2 photodetector means for converting light into an electrical signal;
3 amplifier means for amplifying the electrical signal;
4 access means for transferring the electrical signal from the
5 photodetector means to the amplifier means;
6 reset means for resetting the photodetector; and
7 tapered reset signal means for applying a tapered reset signal to the
8 reset means.

1 9. A method for low noise image formation in an active pixel sensor, the
2 method comprising:

3 reading a signal on a photodetector;
4 transferring the signal from the photodetector to an amplifier;
5 reading out the signal from the amplifier to a bus; and
6 applying a tapered clock signal to a reset transistor in order to reset the
7 photodetector.

1 10. A CMOS imager array comprising a plurality of pixels, each pixel
2 comprising:

3 a photodetector;
4 an access MOSFET having a source connected to the photodetector;
5 an amplifier MOSFET having a gate connected to a drain of the access
6 MOSFET, a source connected to a signal bus, and a drain connected to a column
7 buffer; and
8 a reset MOSFET having a source connected to the drain of the access
9 MOSFET, a drain connected to a column buffer, and a gate connected to a tapered
10 reset signal generator.

1 11. The imager array of Claim 10, further comprising a row disable MOSFET
2 having a source connected to the drain of the reset MOSFET and a drain connected to
3 a row disable signal generator.

1 12. The imager array of Claim 11, further comprising an access signal
2 generator connected to the gate of the access MOSFET.

1 13. The imager array of Claim 12, further comprising a column buffer
2 connected to the signal bus.

1 14. The imager array of Claim 13, wherein the MOSFETs within each pixel
2 are of identical polarity.

1 15. The imager array of Claim 14, wherein the photodetector comprises a
2 substrate diode with the silicide cleared.

ABSTRACT

A low-noise active pixel circuit is disclosed that efficiently suppresses reset (kTC) noise by using a compact preamplifier consisting of a photodetector and only three transistors of identical polarity, in conjunction with ancillary circuits located on an imager's periphery.

The use of only three transistors with a tapered reset signal allows the optical area to be

5 increased, while still providing a low-noise imager.

09097203, 102600

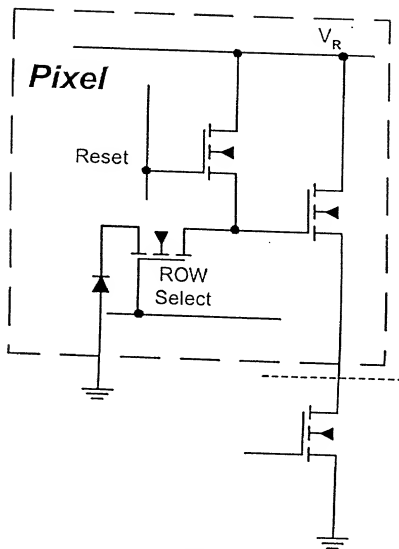


FIGURE 1 (PRIOR ART)

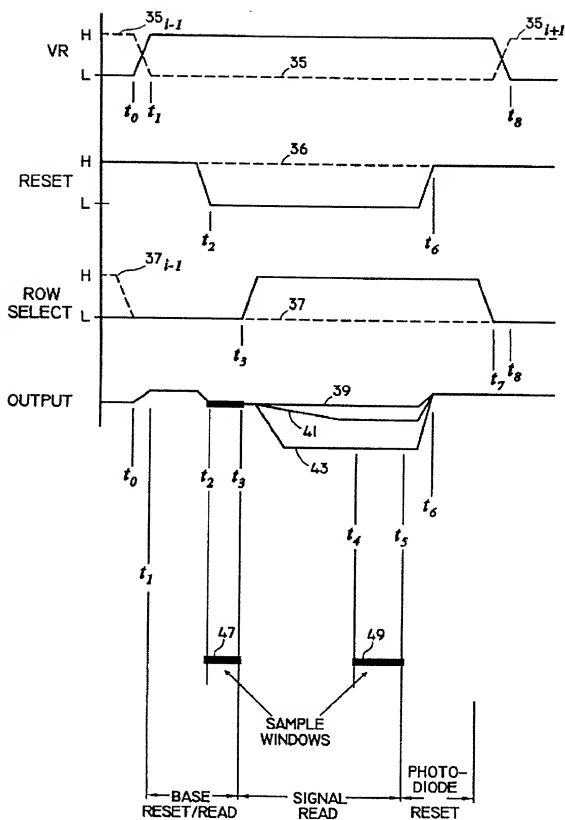


FIGURE 2 (PRIOR ART)

The schematic diagram illustrates a video signal processing circuit, divided into three main functional blocks: 100, 200, and 300.

- Block 100 (Bottom):** Contains transistors M101 and M102. The gate of M101 is controlled by Φ_{Read} , and the gate of M102 is controlled by Φ_R . A read current source I_{read} is connected to the source of M101. The output of M102 is labeled "Video".
- Block 200 (Top):** Contains transistors M201, M202, and M203. The gates of M201 and M202 are controlled by Φ_R , and the gate of M203 is controlled by Φ_{Read} . Current sources V_{Rst_Amp} and V_{Read_amp} are connected to the sources of M202 and M203, respectively. A reset current I_{reset} is also indicated.
- Block 300 (Right):** Contains transistors M3, M301, and M2. The gates of M3 and M2 are controlled by Φ_{Access} . The gate of M301 is controlled by $\Phi_{Row_Disable}$. A reset current source Φ_{Reset} and an access current source Φ_{Access} are connected to the sources of M3 and M2, respectively. A diode 12 is connected to the source of M2.

The circuit is interconnected by four main buses:

- Row Bus #1 (28):** Connects the sources of M101, M102, M201, M202, M203, M3, and M2.
- Row Bus #2 (26):** Connects the gates of M3 and M2.
- Column Bus #1 (20):** Connects the sources of M3 and M2.
- Column Bus #2 (22):** Connects the sources of M201, M202, and M203.

FIGURE 3

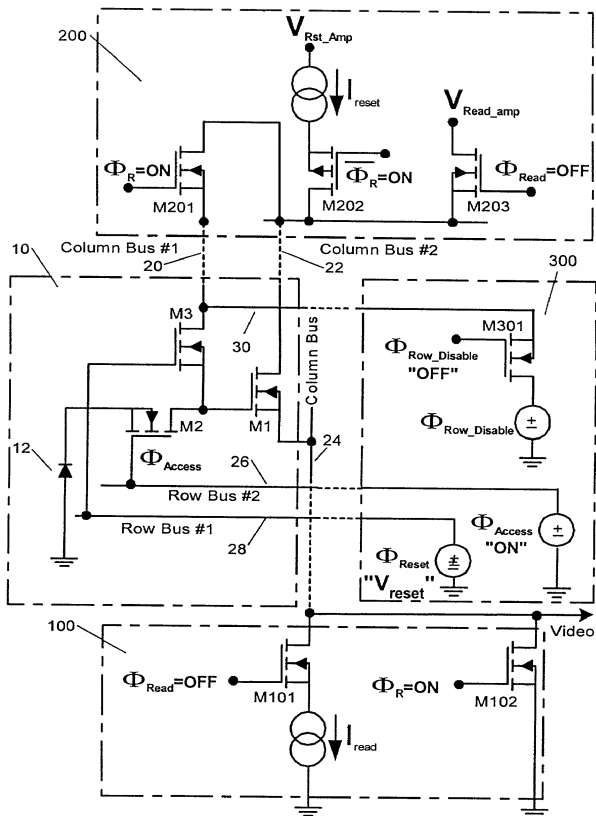


FIGURE 4 (RESET)

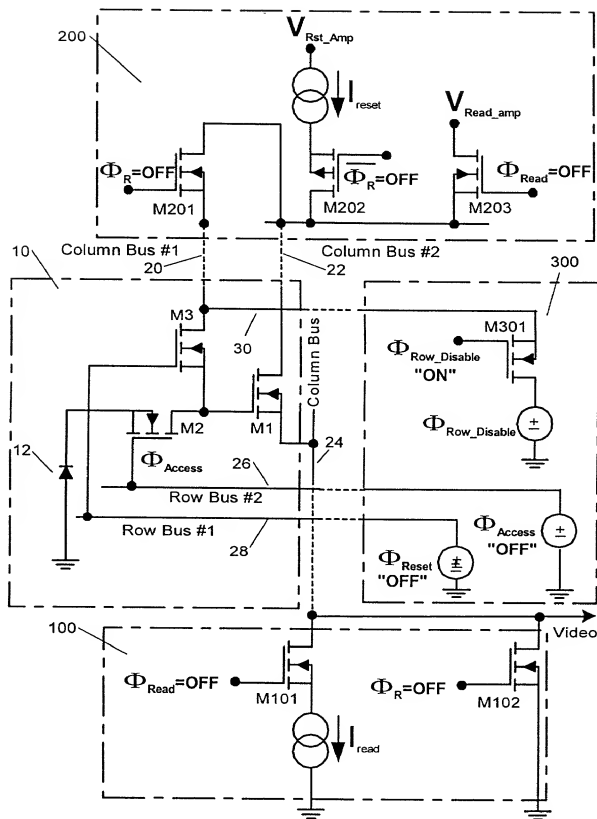


FIGURE 5 (INTEGRATE)

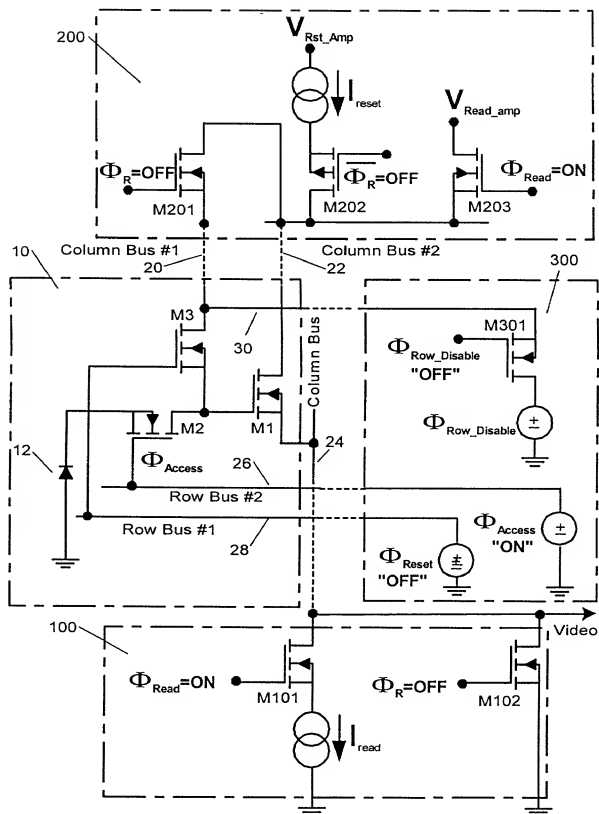


FIGURE 6 (READ)

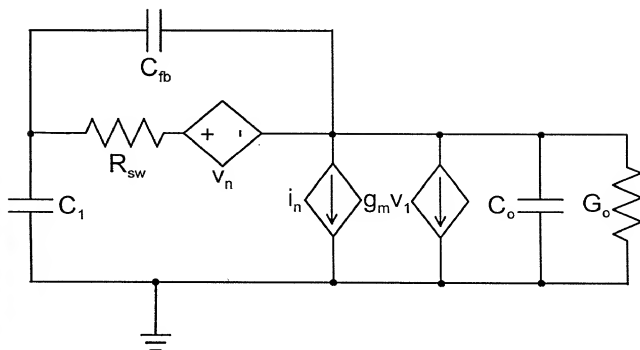


FIGURE 7

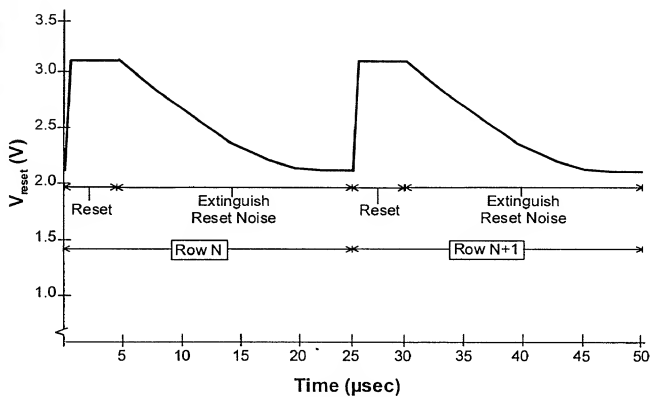


FIGURE 8

Representative Timing Diagram for X by Y CMOS Imager

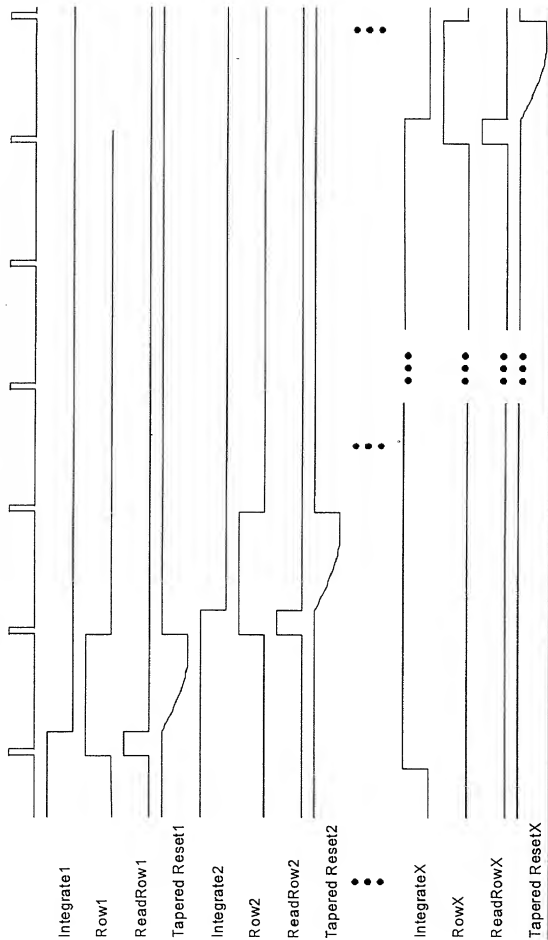


FIGURE 9

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

COMPACT ACTIVE PIXEL WITH LOW-NOISE IMAGE FORMATION

for which application for Letters Patent of the United States of America is filed herewith.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

Yes

No

Number	Country	Day/Month/Year Filed
--------	---------	----------------------

Number	Country	Day/Month/Year Filed
--------	---------	----------------------

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) below.

Application Number	Filing Date
--------------------	-------------

Application Number	Filing Date
--------------------	-------------

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application Number	Filing Date	Status: Patented, Pending, Abandoned
--------------------	-------------	--------------------------------------

Application Number	Filing Date	Status: Patented, Pending, Abandoned
--------------------	-------------	--------------------------------------

I HEREBY APPOINT THE FOLLOWING AS MY ATTORNEYS WITH FULL POWER OF SUBSTITUTION TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT OFFICE CONNECTED THEREWITH:

<u>Attorney</u>	<u>Reg. No.</u>
John W. Carpenter	39,129
J. William Wigert	24,582
Nathan P. Koenig	38,210
Doyle B. Johnson	39,240
Malcolm B. Wittenberg	27,028

Send correspondence to:

Doyle B. Johnson
CROSBY, HEAFEY, ROACH & MAY
P.O. Box 7936
San Francisco, CA 94120-7936
DID Ph.: 415-659-5969
Ph.: 415-543-8700
Fax: 415-391-8269

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under 18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Lester J. Kozlowski

Inventor's signature _____

Date: _____, 2000

Residence: 212 Golden Fern Court, Simi Valley, CA 93065

Citizenship: U.S.A.

Post Office Address: 212 Golden Fern Court, Simi Valley, CA 93065